



MVC300 Car DVR / IP Camera

The MVC300 camera is a sleek and compact video recording device perfect for in-car mounting: an ideal solution if you want to capture any significant events that might occur on the road. It can also be used to augment any fleet management system with added video surveillance.


With Ethernet functionality you can take the MVC300 camera out of the car altogether and integrate it into a stationary surveillance system, in other words it can perfectly double as a fully-fledged IP network camera. Video viewing also does not elude flexibility: it can be done via our Web Users Interface or through any video player capable of processing the RTSP streaming protocol.

Key Features

- Digital video recorder (DVR)
- IP network camera
- Recording to SD card and RTSP streaming
- 5Mpixel sensor
- Full HD
- Ethernet port
- Embedded web server
- Two powering options
- Microphone
- IR LEDs and light sensor (for night version)


**RoHS
Compliant**



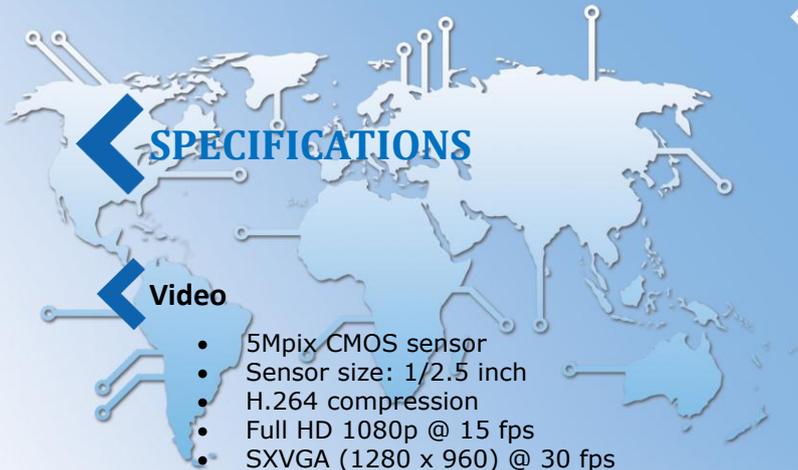

SPECIFICATIONS

Video

- 5Mpix CMOS sensor
- Sensor size: 1/2.5 inch
- H.264 compression
- Full HD 1080p @ 15 fps
- SXVGA (1280 x 960) @ 30 fps

Functions

- 10/100Mbps Ethernet port
- SD/MMC card slot (cards up to 32GB are supported)
- 8 x IR LEDs (for night version only)
- Light sensor (for night version only)
- Microphone
- Powered from DC connector or USB cable
- Embedded web server for live video and configuration
- Configurable RTSP stream
- Recording to SD/MMC card
- Configurable recording length
- Configurable On Screen Display
- Windscreen mounting

Electrical, Mechanical & Environmental

- | | |
|--------------------------|-----------------------------|
| • Dimensions (H x W x D) | 67mm x 67mm x 45mm |
| • Weight | 80g |
| • Power supply | 8-30VDC or USB cable (5VDC) |
| • Power consumption | < 3.5W |
| • Indicators | 1 x status LED |
| • Operating temperature | 0° to 45° C |
| • Storage temperature | -20° to 60° C |
| • Operating humidity | 10% to 90% Non-condensing |
| • Storage humidity | 5% to 95% Non-condensing |



Teltonika reserves the right to modify the functionality of the device without any prior notice.

TELTONIKA JSC
Saltoniskiu str.10C, LT08105
Vilnius, Lithuania
Phone: +370 5 265 73 60
Fax: +370 5 276 13 80
info@teltonika.lt
www.teltonika.lt